




Black Hawk – no evil shall pass

The 24" G-MASTER GE2488HS known as Black Hawk is the perfect companion at your side. Hard-bitten and trust-worthy, it will make your enemies shiver. Famous for being a very capable hunter with extremely good vision the Black Hawk, armed with FreeSync Technology, eliminates your enemies with a stunning 1 ms response time. And if darkness falls across the land, the Black Tuner function allows you to adjust brightness in the dark shades enhancing detail in shadowed areas making sure no foes remain unseen. So login to the world of games, put on your headset and immerse yourself in your favourite game displayed in beautiful clarity.

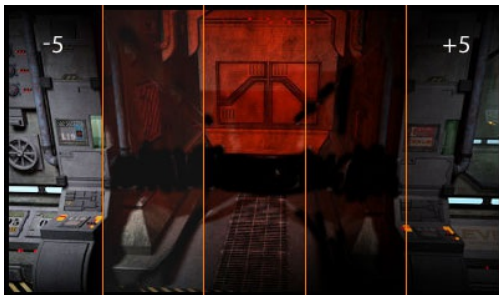

Black Tuner

The users can adjust the brightness and the dark shades with the Black Tuner, giving greater viewing performance in shadowed areas and helping to spot the enemy earlier.



FreeSync™ Technology

01 DISPLAY CHARACTERISTICS

Diagonal	24", 61cm
Panel	TN LED, matte finish
Native resolution	1920 x 1080 @75Hz (2.1 megapixel Full HD)
Aspect ratio	16:9
Panel brightness	250 cd/m ²
Static contrast	1000:1
Advanced contrast	12M:1
Response time (GTG)	1ms
Viewing zone	horizontal/vertical: 170°/160°, right/left: 85°/85°, up/down: 80°/80°
Colour support	16.7mln
Horizontal Sync	30 - 80kHz
Viewable area W x H	531.4 x 298.9mm, 20.9 x 11.8"
Pixel pitch	0.277mm
Colour	matte

02 INTERFACES / CONNECTORS / CONTROLS

Signal input	VGA x1 DVI x1 HDMI x1
HDCP	yes
Headphone connector	yes

03 FEATURES

Blue light reducer	yes
Flicker free	yes
Adaptive Sync support	HDMI
OSD languages	EN, DE, FR, IT, CN, RU, JP, CZ, NL, PL
Control buttons	Power, Select/ Input Select, Scroll up/ Audio Adjust, Scroll down/ i-Style Mode, Menu
User controls	picture adjust (contrast, brightness, OverDrive, ACR, ECO), input select, audio adjust (volume, mute, HDMI audio), store user settings, colour adjust, manual image adjust (i-Style mode, H./V. position, clock, phase, sharpness, black tuner, HDMI RGB range, video mode adjust, blue light reducer), setup menu (language select, FreeSync, OSD position, OSD time out, OSD background, LED, opening logo, auto image adjust), information, memory recall
Speakers	2 x 1W
Convenience	Kensington-lock™ prepared, DDC2B, Mac OSX

04 MECHANICAL

Display position adjustments	tilt
Tilt angle	20° up; 2° down
VESA mounting	100 x 100mm

05 ACCESSORIES INCLUDED

Cables	power, HDMI, Audio
Other	quick start guide, safety guide

06 POWER MANAGEMENT


Power supply unit	internal
Power supply	AC 100 - 240V, 50/60Hz
Power usage	23W typical, 0.5W stand by, 0.5W off mode

07 SUSTAINABILITY

Regulations	CE, TÜV-Bauart, RoHS support, ErP, WEEE, CU, REACH
REACH SVHC	above 0.1%: Lead

08 DIMENSIONS / WEIGHT

Product dimensions W x H x D	568 x 409 x 217.5mm
Weight (without box)	3.5kg
EAN code	4948570114931

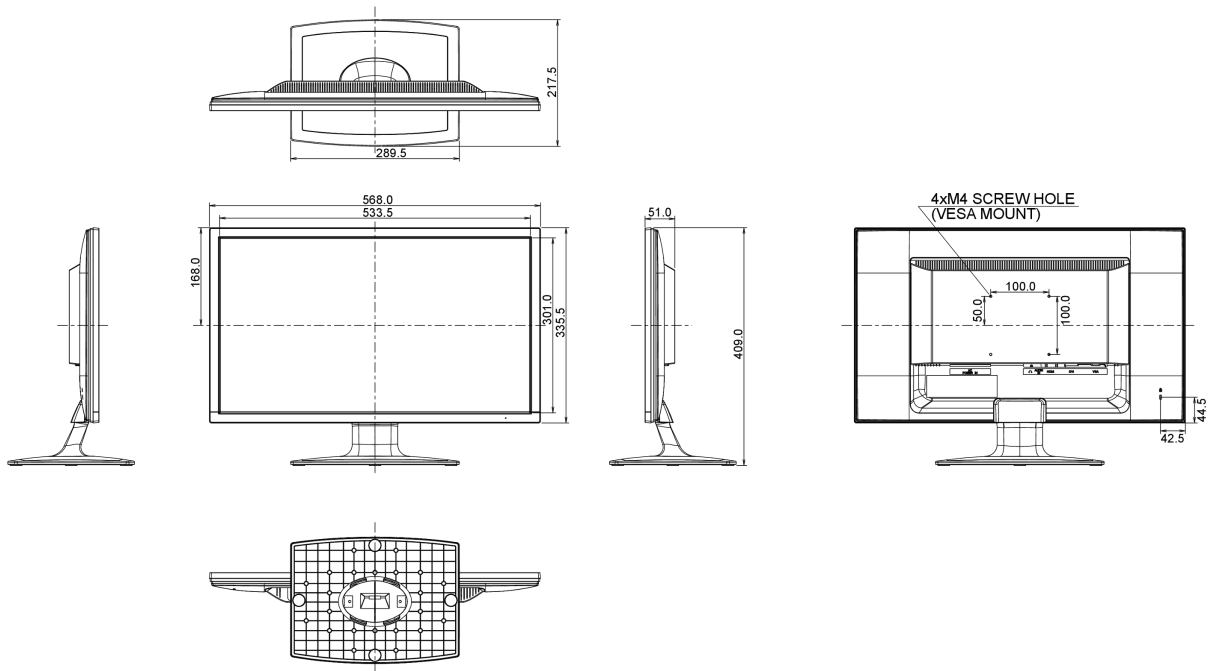

All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.

© IIYAMA CORPORATION. ALL RIGHTS RESERVED