



A height adjustable 32" IPS Panel Technology monitor featuring WQHD resolution

Looking for the perfect monitor? Choose the best all-around IPS Panel Technology guaranteeing perfect colour reproduction with wide viewing angles. Meeting the demands of both graphic design and the modern work place, the 32" XB3270QS with a high WQHD resolution offers the perfect solution for productivity, design and data analysis. The height-adjustable stand ensures you can adjust the screen position to your preferences, and the flicker-free panel with blue light reducer function reduces eye fatigue. This high-end feature-rich panel is the new hallmark of the discerning user across many sectors.

Available also with fixed stand : [ProLite X3270QSU-B1](#)



WQHD

With true WQHD 2560 x 1440p resolution your monitor is ready to display high definition images. This means you can accommodate more information on your screen, i.e. over 76% more in comparison to a 1920 x 1080 monitor.



Height Adjustable Stand

A Height Adjustable Stand allows you to set the perfect position of the screen ensuring ergonomic posture and optimal viewing comfort which benefits not only your health but also productivity.

01 DISPLAY CHARACTERISTICS

Diagonal	31.5", 80cm
Panel	IPS Panel Technology LED, matte finish
Native resolution	2560 x 1440 @60Hz (WQHD, 3.7 megapixel)
Aspect ratio	16:9
Panel brightness	250 cd/m ²
Static contrast	1200:1
Advanced contrast	80M:1
Response time (GTG)	4ms
Viewing zone	horizontal/vertical: 178°/178°, right/left: 89°/89°, up/down: 89°/89°
Colour support	1.07B 10bit (8bit + Hi-FRC) (sRGB:100%, NTSC: 72%)
Horizontal Sync	30 - 90kHz
Viewable area W x H	698.1 x 392.7mm, 27.5 x 15.5"
Pixel pitch	0.273mm
Colour	matte

02 INTERFACES / CONNECTORS / CONTROLS

Signal input	DVI x1 HDMI x1 DisplayPort x1
HDCP	yes
Headphone connector	yes

03 FEATURES

Blue light reducer	yes
Flicker free	yes
OSD languages	EN, DE, FR, IT, CN, RU, JP, CZ, NL, PL
Control buttons	Power, Input/ Select, Scroll up/ Audio, Scroll down/ i-Style Colour, Menu
User controls	input select, picture (brightness, contrast, sharpness, OverDrive, ACR, ECO, Blue Light Reducer, X-Res Technology), audio (volume, mute, audio input), colour settings, language, OSD settings (OSD H. position, OSD V. position, OSD background, OSD timeout), setup menu (video mode adjust, opening logo, LED, information, reset)
Speakers	2 x 3W
Convenience	Kensington-lock™ prepared, DDC2B, Mac OSX

04 MECHANICAL

Display position adjustments	height, swivel, tilt
Height adjustment	100mm
Swivel stand	90°; 45° left; 45° right
Tilt angle	22° up; 3° down
VESA mounting	100 x 100mm

05 ACCESSORIES INCLUDED

Cables	power, HDMI, DP
Other	quick start guide, safety guide

06 POWER MANAGEMENT


Power supply unit	internal
Power supply	AC 100 - 240V, 50/60Hz
Power usage	39W typical, 0.5W stand by, 0.5W off mode

07 SUSTAINABILITY

Regulations	CE, TÜV-Bauart, EAC, VCCI-B, PSE, RoHS support, ErP, WEEE, REACH
Energy efficiency class (Regulation (EU) 2017/1369)	G
REACH SVHC	above 0.1%: Lead

08 DIMENSIONS / WEIGHT

Product dimensions W x H x D	726 x 453 (553) x 230mm
Box dimensions W x H x D	810 x 215 x 509mm
Weight (without box)	8.6kg
Weight (without stand)	5.9kg
EAN code	4948570115518

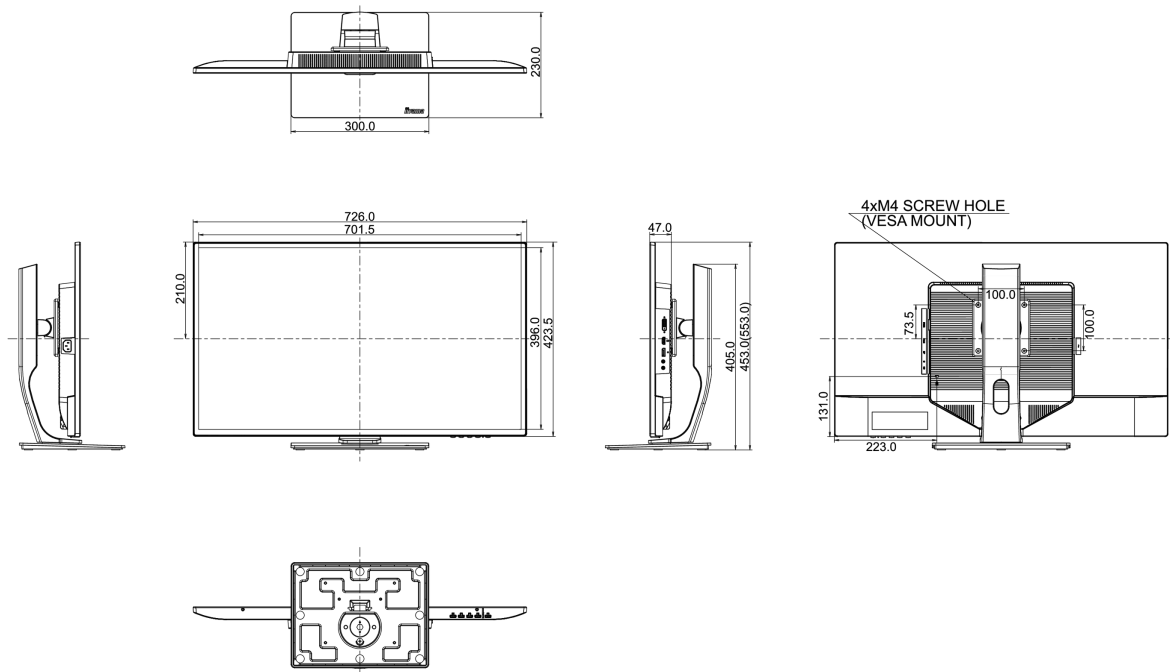

All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.