




Silver Crow – enter a new dimension

The 27" G-MASTER GB2730QSU known as Silver Crow opens you to a whole new level of gaming experiences. As the 2560x1440 display offers 77% more on-screen space than a standard 1920x1080 Full HD monitor, The Silver Crow makes sure all the finest details are displayed with perfect image clarity. Nothing will skip your attention. The blue light reducer function along with the flicker free panel are the shield your eyes need to guarantee your vision remains well protected. Armed with FreeSync technology and 1ms response time the Silver Crow is ready to lead you into the toughest battles, leaving nothing to chance.

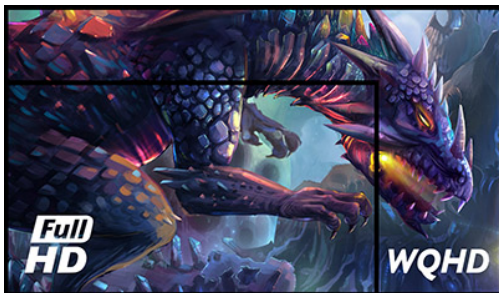

WQHD



FreeSync™ Technology

With the 2560x1440 WQHD resolution offering 77% more on-screen space than a standard 1920x1080 full HD monitor, nothing skips your attention.

01 DISPLAY CHARACTERISTICS

| | |
|---------------------|---|
| Diagonal | 27", 68.5cm |
| Panel | TN LED, matte finish |
| Native resolution | 2560 x 1440 @75Hz (3.7 megapixel WQHD, DisplayPort) |
| Aspect ratio | 16:9 |
| Panel brightness | 350 cd/m ² |
| Static contrast | 1000:1 |
| Advanced contrast | 80M:1 |
| Response time (GTG) | 1ms |
| Viewing zone | horizontal/vertical: 170°/160°, right/left: 85°/85°, up/down: 80°/80° |
| Colour support | 16.7mIn (sRGB: 99%; NTSC: 72%) |
| Horizontal Sync | 30 - 89kHz |
| Viewable area W x H | 596.7 x 335.7mm, 23.5 x 13.2" |
| Pixel pitch | 0.233mm |
| Colour | matte, black |

02 INTERFACES / CONNECTORS / CONTROLS

| | |
|---------------------|--|
| Signal input | DVI x1 (max. 2560 x 1440 @60Hz) HDMI x1 (v.1.4, max. 2560 x 1440 @70Hz) DisplayPort x1 (v.1.2, max. 2560 x 1440 @75Hz) |
| USB HUB | x2 (v.3.2 (Gen 1, 5Gbit; DC5V, 900mA)) |
| HDCP | yes |
| Headphone connector | yes |

03 FEATURES

| | |
|-----------------------|---|
| Blue light reducer | yes |
| Flicker free | yes |
| Adaptive Sync support | DisplayPort: @48-75Hz |
| OSD languages | EN, DE, FR, ES, IT, RU, JP, CZ, NL, PL |
| Control buttons | Power, Menu/ Select, Scroll up/ Volume, Scroll down/ ECO, Exit, Input |
| User controls | picture adjust (contrast, brightness, OverDrive, ACR, ECO, blue light reducer, black tuner, saturation, gamma), input select, audio adjust (volume, mute, audio input), store user setting, colour, image adjust (i-Style colour, sharp and soft, HDMI RGB range, video mode adjust), language, setup menu (OSD position, OSD time out, opening logo, FreeSync), display information, reset |
| Speakers | 2 x 2W |
| Convenience | Kensington-lock™ prepared, DDC2B, Mac OSX |

04 MECHANICAL

| | |
|------------------------------|--|
| Display position adjustments | height, pivot (rotation), swivel, tilt |
| Height adjustment | 150mm |
| Rotation (PIVOT function) | 90° |
| Swivel stand | 90°; 45° left; 45° right |
| Tilt angle | 23° up; 5° down |
| VESA mounting | 100 x 100mm |
| Cable management system | yes |

05 ACCESSORIES INCLUDED

| | |
|--------|---------------------------------|
| Cables | power, USB, HDMI, DP |
| Other | quick start guide, safety guide |

06 POWER MANAGEMENT

| | |
|-------------------|---|
| Power supply unit | internal |
| Power supply | AC 100 - 240V, 50/60Hz |
| Power usage | 30W typical, 0.5W stand by, 0.3W off mode |

07 SUSTAINABILITY

| | |
|---|---|
| Regulations | CE, TÜV-GS, EAC, RoHS support, ErP, WEEE, REACH, UKCA |
| Energy efficiency class (Regulation (EU) 2017/1369) | F |
| REACH SVHC | above 0.1%: Lead |

08 DIMENSIONS / WEIGHT

| | |
|------------------------------|---------------------------|
| Product dimensions W x H x D | 613.5 x 400 (550) x 252mm |
| Weight (without box) | 5.8kg |
| EAN code | 4948570121991 |

