




**27” Optical Bonded PCAP 10pt touchscreen monitor with edge-to-edge glass, active stylus support (MPP 2.0), anti-fingerprint coating and a flexible stand**

The ProLite T2755QSC with its WQHD (2560x1440) resolution and IPS panel technology offers exceptional colors and wide viewing angles. The Optical Bonded Projective Capacitive (PCAP) 10-point touch technology ensures a seamless and accurate touch response and a lower light reflection, in addition, the display is protected against humidity and potential moisture development. A special anti-fingerprint coating ensures a smoother touch and less resistance in the swipe. It makes the screen less static and susceptible to dirt, dust and fingerprints. The monitor supports MPP2.0 (Microsoft Pen Protocol) technology, which is used in digital pens and styluses for use with compatible devices. The pen or stylus can interact with the ProLite T2755QSC, allowing users to write, draw, and navigate on the screen. It is very precise and supports tilt functionality, meaning the users can adjust the thickness and angle of their lines by tilting the pen, providing a more natural and intuitive writing and drawing experience. Its flexible stand can be positioned at several angles creating a comfortable and ergonomic user experience. A perfect choice for a vast array of creative applications.



MPP2.0 Podrška

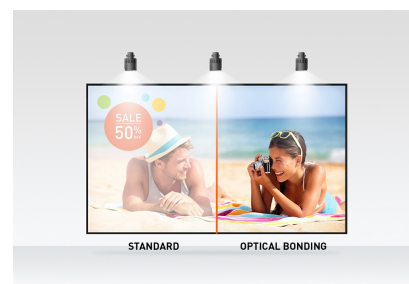

PCAP sa optičkim vezama

Optički vezana projektivna kapacitivna (PCAP) tehnologija dodira smanjuje vazdušni jaz između sloja dodira i ekrana čineći odgovor na dodir preciznijim. Takođe poboljšava vizuelni kvalitet smanjujući refleksije i odsjaj. Pored toga, ekran je zaštićen od prašine i potencijalnog razvoja vlage.

## 01 KARAKTERISTIKE EKRANA

Dizajn	Staklo od ivice do ivice
Dijagonala	27", 68.4cm
Panel	IPS
Osnovna rezolucija	2560 x 1440 @75Hz (3.7 megapixel Full HD)
Osnovna rezolucija	75Hz
Format ekrana	16:9
Osvetljenje	400 cd/m <sup>2</sup>
Osvetljenje	360 cd/m <sup>2</sup> sa dodirrom
Propusnost svetla	90%
Statički kontrast	1000:1
Vreme odziva (GTG)	5ms
Zona gledanja	horizontalno/vertikalno: 178°/178°, desno/levo: 89°/89°, gore/dole: 89°/89°
Podržane boje	16.7miliona 8bit
Horizontalna sinhronizacija	30 - 100KHz
Vidljiva površina Š x V	597 x 336mm, 23.5 x 13.2"
Razmak piksela	0.233mm
Boja okvra	crna, mat

## 02 TOUCH

Touch tehnologija	vezan PCAP
Tačke dodira	10 (HID, samo sa podržanim OS)
Preciznost dodira	+/- 2mm
Način dodira	olovka, prst, rukavica (lateks)
Interfejs dodira	USB
Podržani operativni sistemi	Svi iiyama monitori su Plug & Play kompatibilni sa Windows Linux operativnim sistemima. Detalje o podržanom OS-u za modele osetljive na dodir potražite u odjeljku za preuzimanje u uputstvima za instalaciju drajvera.
Odbijanje dlana	da

## 03 KONEKTORI / KONTROLE

Ulaz digitalnog signala	HDMI x1 DisplayPort x1
Audio izlaz	Mini konektor x1 Zvučnici 2 x 1W
HDCP	da
USB HUB	x2 (3.2 Gen 1 (5Gbps, DC5V, 900mA))

## 04 KARAKTERISTIKE

Dodatno	premaz protiv otiska prsta, MPP2.0
Tvrdoća stakla	7H
Zaključavanje OSD tastera	da

## 05 OPŠTE

OSD jezici	EN, DE, FR, ES, IT, PT, RU, JP, NL, PL
------------	--

<b>Kontrolni tasteri</b>	Pritisnite/unesite, desno/jačina, levo/eko/izlaz, gore/izbor signala, dole, napajanje
<b>Korisničke kontrole</b>	Podešavanje slike (osvetljenje, kontrast, i-Style Color, adv. kontrast, ECO, OverDrive, X-Res tehnologija), podešavanja boja (gama, RGB opseg, temp. boja), podešavanja slike (podešavanje video režima, reduktor plave svetlosti, oštar i mekan), OSD (horizontalni položaj, vertikalni položaj, vreme na ekranu, pozadina menija na ekranu, jezik, informacije o ekranu), ekstra (resetovanje, DDC/CI, izbor signala, jačina zvuka, utišavanje, logo za otvaranje, LED, prekidač na dodir)
<b>Pogodnost</b>	Kensington-lock™ priprema
<b>Redukcija plavog svetla</b>	da
<b>Bez treperenja</b>	da
<b>Plug&amp;Play</b>	DDC2B

## 06 MEHANIČKI

<b>Ugao nagiba</b>	15° gore; 70° dole
<b>VESA montiranje</b>	100 x 100mm
<b>MTBF - Prosecno vreme izmedju kvarova</b>	50000 sati (izuzimajući pozadinsko osvetljenje)

## 07 UKLJUČENI DODACI

<b>Kablovi</b>	Strujni kabl, USB, HDMI
<b>Upustva</b>	kratko uputstvo, bezbednosni vodič
<b>Ostalo</b>	spiralna cev

## 08 UPRAVLJANJE NAPAJANJEM


<b>Napajanje</b>	interna
<b>Potrošnja energije</b>	% 1W tipično, 1.5W stand by, 0.3W iskljucen

## 09 ODRŽIVOST

<b>Propisi</b>	CE, TÜV-Bauart, EAC, RoHS podrška, ErP, WEEE, REACH, UKCA
<b>Klasa energetske efikasnosti (Regulation (EU) 2017/1369)</b>	D
<b>REACH SVHC</b>	iznad 0.1%: Olova

## 10 DIMENZIJE / TEŽINA

<b>Dimenzije proizvoda Š x V x D</b>	614 x 364.5 x 49mm
<b>Dimenzije kutije Š x V x D</b>	710 x 460 x 130mm
<b>Težina (bez kutije)</b>	5.8kg
<b>Težina (sa kutijom)</b>	7.3kg
<b>EAN kod</b>	4948570122981

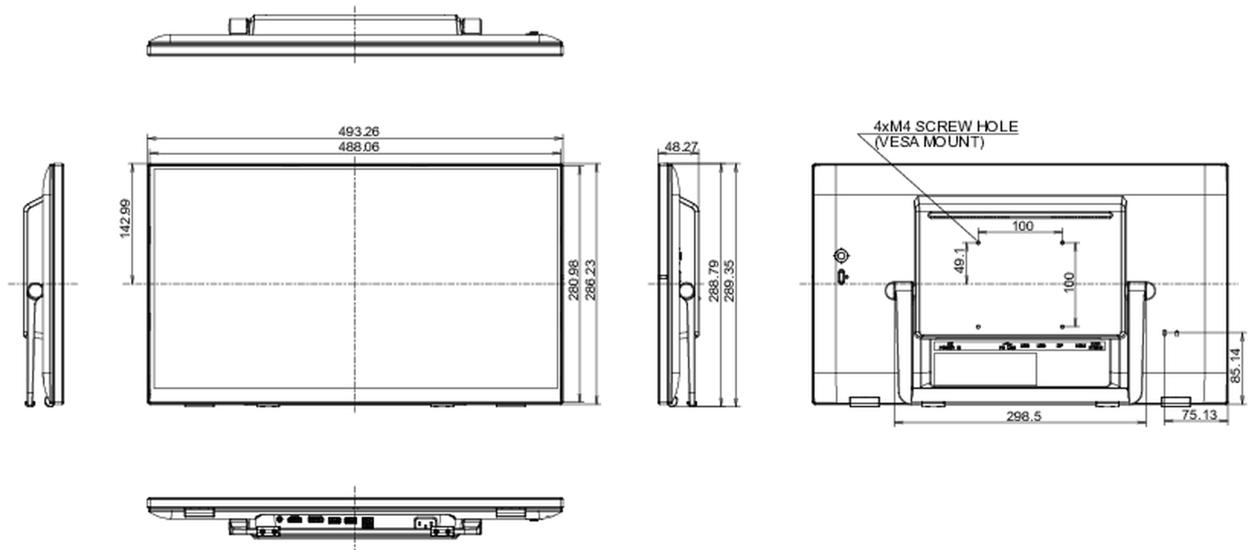

All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.

© IIYAMA CORPORATION. ALL RIGHTS RESERVED