




**38" stretched digital signage display with 24/7 operating time, 1000cd/m<sup>2</sup> and landscape and portrait orientation**


Give your sales promotions and your in-store displays maximum impact and visibility with the ProLite S3820HSB-B1. The S3820HSB is a 38" (1920x540) digital signage display that is ideally suited for retail, transportation, business and health care environments where a regular 16:9 display will not fit.

With a 24/7 operating time, landscape and portrait orientation and brightness of 1000cd/m<sup>2</sup>, this display can be installed anyhow and anywhere you want, ensuring an optimal fit and maximum exposure. The S3820HSB is fanless, only weighs 8.8 kg and comes with two handles for easy handling and installation.

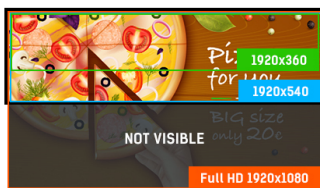

Full HD content

The 20-series stretched displays feature screen resolutions that are respectively 1/3 (28") and 1/2 (38") of the standard Full HD resolution (1920x1080). The content for these displays needs to be created in Full HD resolution with the part of the content that needs to be shown placed in the first 360 pixels for the S2820HSB-B1 and in the first 540 pixels for the S3820HSB-B1.

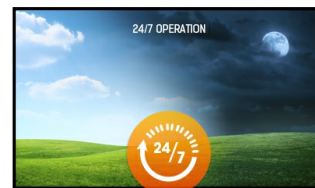

24/7

24/7 displays are designed for a continuous operation.

## 01 DISPLAY CHARACTERISTICS

Diagonal	38", 96.5cm
Panel	MVA LED, matte finish
Native resolution	1920 x 540 @60Hz (1.0 megapixel)
Aspect ratio	16:4.5
Panel brightness	1000 cd/m <sup>2</sup>
Static contrast	4000:1
Response time (GTG)	8ms
Viewing zone	horizontal/vertical: 178°/178°, right/left: 89°/89°, up/down: 89°/89°
Colour support	16.7mIn 8bit
Horizontal Sync	30 - 83kHz
Viewable area W x H	919.3 x 258.5mm, 36.2 x 10.2"
Bezel width (sides, top, bottom)	19.1mm, 16.4mm, 25mm
Pixel pitch	0.1596 x 0.4788mm
Bezel colour and finish	black, matte

## 02 INTERFACES / CONNECTORS / CONTROLS

Analog signal input	VGA x1
Digital signal input	DVI x1 HDMI x1
Audio input	Mini jack x1
Monitor control input	RS-232c x1
Audio output	Speakers 2 x 5W
Monitor control output	RS-232c x1

## 03 FEATURES

Extra	Sunlight readable, portrait orientation left and right, handles
Max. non-stop operating time	24/7
Housing (bezel)	metal
Brightness sensor	yes

## 04 GENERAL

OSD languages	EN
Control buttons	Power, Increase / Input Select, Menu / Enter, Decrease / Brightness
User controls	brightness (OSD brightness, ambient light sensor with OSD offset, brightness, contrast, exit), signal select, sound (volume, mute, exit), color (color adjustment, sRGB, color temp, exit), image (auto adjustment, clock, phase, H. position, V. position, exit), tools (OSD control, reset, sharpness, exit), exit.
Plug&Play	DDC2B, Mac OSX

## 05 MECHANICAL

Orientation	landscape, portrait
Fanless design	yes
VESA mounting	400 x 100mm
Operation temperature range	0°C - 50°C

Storage temperature range

- 20°C - 60°C

MTBF

100.000 hours

## 06 ACCESSORIES INCLUDED

Cables

power, HDMI (1.8m), RS-232c

Guides

quick start guide, safety guide

Other

light sensor cable

## 07 POWER MANAGEMENT

Power supply unit

external

Power supply

DC 12 V

Power usage

42.5W typical, 1.5W stand by, 1.5W off mode

## 08 SUSTAINABILITY

Regulations

CB, CE, RoHS support, ErP, WEEE, CU, REACH

REACH SVHC

above 0.1%: Lead

## 09 DIMENSIONS / WEIGHT

Product dimensions W x H x D


962.6 x 304.9 x 54.2mm

Weight (without box)

8.8kg

EAN code

4948570116881

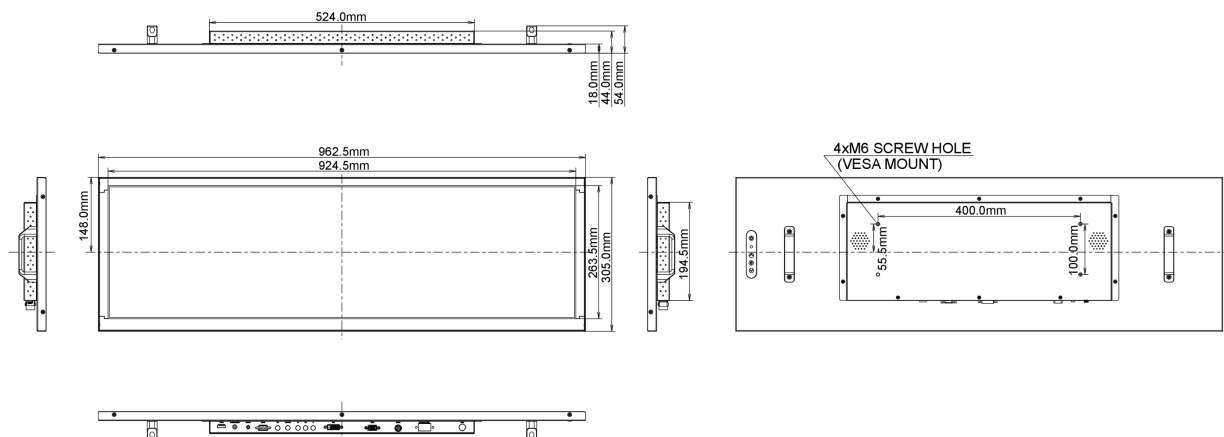

*All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.*

© IYAMA CORPORATION. ALL RIGHTS RESERVED