



Immerse yourself in the game with the curved GB3466WQSU Red Eagle with FreeSync Premium Pro.


Inspired by the curve of the human eye, the 1500R curved VA panel with 144Hz refresh rate, 1ms MPRT and the 3440x1440 resolution, guarantees superb image quality and a comfortable and very realistic viewing experience.

The height adjustable stand ensures total flexibility for your perfect screen position. Customize the screen settings using the predefined and custom gaming modes along with the Black Tuner function to give you total control over the dark scenes and make sure details are always clearly visible.



Freesync™ Premium Pro Technology

This monitor supports HDR content with meticulous colour and luminance. Low input latency and low framerate compensation put an end to any tearing or stuttering issues at virtually any framerate.

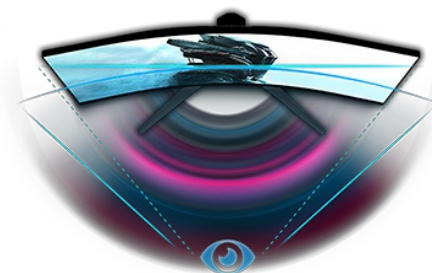

Curved Design 1500R

The 1500R curvature of the screen guarantees a realistic and comfortable viewing experience allowing you to really immerse yourself in the game.

01 DISPLAY CHARACTERISTICS

Diagonal	34", 86.5cm
Panel	VA LED, matte finish
Curved	1500R
Native resolution	3440 x 1440 @144Hz (4.9 megapixel UWQHD, DisplayPort)
Aspect ratio	21:9
Panel brightness	400 cd/m ²
Static contrast	3000:1
Advanced contrast	80M:1
Response time (MPRT)	1ms
Viewing zone	horizontal/vertical: 178°/178°, right/left: 89°/89°, up/down: 89°/89°
Colour support	16.7mIn 8bit
Horizontal Sync	30 - 160kHz
Viewable area W x H	797.22 x 333.72mm, 31.4 x 13.1"
Pixel pitch	0.23175mm
Colour	matte, black

02 INTERFACES / CONNECTORS / CONTROLS

Signal input	HDMI x2 (v.2.0, max. 3440 x 1440 @100Hz) DisplayPort x2 (v.1.4, max. 3440 x 1440 @144Hz)
USB HUB	x2 (v.3.2 (Gen 1, 5Gbit))
HDCP	yes
Headphone connector	yes

03 FEATURES

Blue light reducer	yes
Flicker free	yes
Adaptive Sync support	HDMI: 3440 x 1440 @48-100Hz, DP: 3440 x 1440 @48-144Hz
HDR	HDR400
OSD languages	EN, DE, FR, ES, IT, RU, JP, CZ, NL, PL
Control buttons	joystick controller: Push (Menu/Power), Up (Input Select), Down (Exit), Left (Eco Mode), Right (Volume)
User controls	picture adjust (brightness, contrast, ECO, blue light reducer, ACR, OD, MBR, black tuner, colour saturation, gamma), colour settings (colour temp., user preset, i-Style colour), image adjust (sharp and soft, HDMI RGB range, direct drive mode, video mode adjust, HDR, FreeSync), OSD (OSD H. position, OSD V. position, OSD time), language, miscellaneous (opening logo, LED, display information, PiP/PbP, PiP position, PiP size), input select (input select, sub source, DP mode), audio settings (volume, mute, audio-input), store user settings, recall
Speakers	2 x 3W
Convenience	Kensington-lock™ prepared, DDC2B, Mac OSX

04 MECHANICAL

Display position adjustments	height, tilt
Height adjustment	110mm
Tilt angle	20° up; 5° down
VESA mounting	100 x 100mm

05 ACCESSORIES INCLUDED

Cables	power, USB, HDMI, DP
Other	quick start guide, safety guide

06 POWER MANAGEMENT


Power supply unit	internal
Power supply	AC 100 - 240V, 50/60Hz
Power usage	60W typical, 0.5W stand by, 0.5W off mode

07 SUSTAINABILITY

Regulations	CE, EAC, RoHS support, ErP, WEEE, REACH
Energy efficiency class (Regulation (EU) 2017/1369)	F
REACH SVHC	above 0.1%: Lead, Lead monoxide, Diboron trioxide

08 DIMENSIONS / WEIGHT

Product dimensions W x H x D	808 x 441.5 (551.5) x 256mm
Box dimensions W x H x D	909 x 505 x 282mm
Weight (without box)	10.9kg
Weight (without stand)	6kg
EAN code	4948570117406

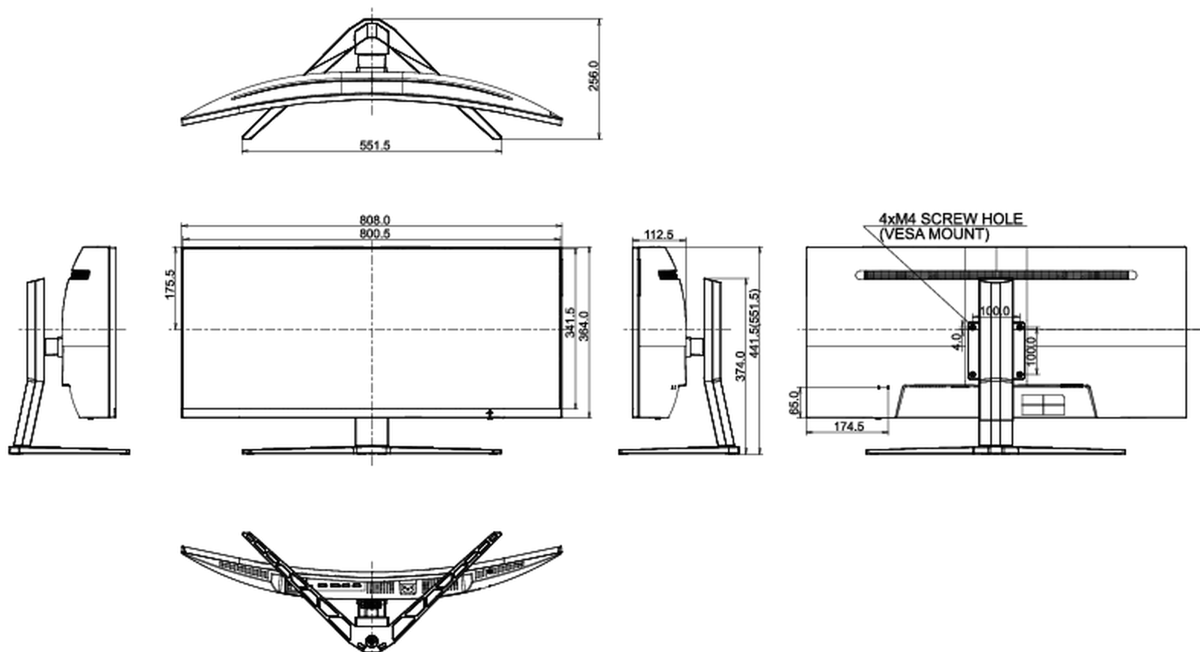

All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.

© IIYAMA CORPORATION. ALL RIGHTS RESERVED